



SELECTION GUIDE

2020
2021

Products, Foundry Processes
& Chipset for RF & microwave Solutions

Contents

Products	3
Foundry open processes	12
GaN products	14
5G Offer	16
Chipset solutions	18
Aerospace, Defence and Instrumentation	18
L-band chipset	18
S-band chipset	20
C-band chipset	22
X-band chipset	24
Ku-band chipset	26
Ka-band chipset	28
6-18Ghz chipset	30
Automotive	32
Telecoms from 6GHz to E-band	34
6-8.5GHz chipset	34
13-18GHz & VSAT Ku chipset	36
23-26GHz chipset	38
28-32GHz & VSAT Ka chipset	40
36-44GHz chipset	42
52-85GHz & E-band	44
Catalogue products commercial designation	46
Notes	47

Part Number	RF Bandwidth (GHz)	Gain (dB)	Noise Figure (dB)	Dynamic Range (dB)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4102-QEG	2-4	20	-	31.5	23.5	24.5	200	5	QFN
CHA3511-99F	6-18	16	7	39	20	22	190	4.5	Die
CHA3512-99F	6-18	16	7	20	20	23	210	4.5	Die
CHA3513-99F	6-18	19	12	25	18	20	300	4.5	Die
CHA3514-99F	6-18	13	7	39.5	18	19	190	4.5	Die

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA6015-99F	2-8	18.5	-	36.5	37.5	29 @ 3dB comp	2000	7	Die
CHA7618-99F	5-18	30	-	-	40 @ 8dB comp	24 @ 8dBcomp	800	18	Die
CHA8012-99F	5.2-6	22	-	-	41.5	43 @ 3dB comp	2100	8	Die
CHA7060-QWA	5.7-8.5	20	46	36	40	32 @ 10dBm	700	20	QFN
CHA8054-99F	7.7-8.6	27	-	-	43.6	50 @ 7dB comp	900	28	Die
CHA6105-99F	8-12	30	-	30.5	31.5	-	700	8	Die
CHA6005-99F	8-12	22	-	31.5	32.5	38 @ 3dB comp	350	8	Die
CHA6005-QEG	8-12	19.5	-	31.5	32	35 @ 3dB comp	420	8	QFN
CHA6710-99F	8-12.75	23.5	-	-	37.4	36 @ Psat	200	25	Die
CHA6710-FAB	8-12.75	22.5	-	-	37	35 @ Psat	200	25	Hermetic SMD
CHA8710a99F	8.5-10.5	28.5	-	-	44	44 @ Psat	750	25	Die
CHA8610-99F	8.5-11	24	-	-	41.8	40 @ Psat	680	30	Die
CHA8611-99F	8.5-11	24	-	-	42.5	43 @ Psat	800	25	Die
CHA7114-99F	8.5-11.5	20	-	-	39.8	40 @ 4dB comp	2000	8	Die
CHA7115-99F	8.5-11.5	27.5	-	-	39	37 @ 4dB comp	2200	8	Die
CHA7215-99F	8.5-11.5	28	-	-	39.5	34 @ 4dB comp	2300	8	Die
CHA8212-99F	8.5-11.5	35	-	35	44.5	36 @ 7dB comp	750	28	Die
CHA8100-99F	9-10.5	18	-	-	41	40 @ 3dB comp	2100	9	Die
CHA6550-98F	17- 23.6	22	39	33.5	34	20 @ Psat	1300	6	Die
CHA6550-QXG	17- 24	22	41	33.5	34	20 @ Psat	1300	6	QFN
CHA6551-99F	17-24	22	39	30	32	25 @ Psat	880	4	Die
CHA6362-QXG	17.7-19.7	22	42	33	34.5	24 @ Psat	1340	6	QFN
CHA6652-98F	21-27.5	22.5	39	32.5	33	25 @ Psat	1300	6	Die
CHA6652-QXG	21-27.5	20	41	32.5	33	25 @ Psat	1300	6	QFN
CHA6356-QXG	21.2-23.6	20	42	33	33.5	22 @ Psat	1300	6	QFN
CHA6653-98F	27-33.5	20	38	32	33	23 @ Psat	900	6	Die
CHA6653-QXG	27-33.5	20	38	32	33	23 @ Psat	900	6	QFN
CHA5659-98F	36-43.5	22	38	30	31	15 @ Psat	800	6	Die
CHA5659-QXG	36-43.5	20	38.5	29.5	30	15 @ Psat	800	6	QFN
CHA6194-QXG	37- 40	20	38	30	31	-	800	6	QFN

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3801-99F	1-2	28	0.5	1.5	15	70	5	Die
CHA3801-FAB	1-2	28	0.5	1.5	16	70	5	Hermetic SMD
CHA3801-QDG	1-2	28	0.5	1.5	15	70	5	QFN
CHA3218-99F	2-18	24	1	2	15	120	4	Die
CHA3024-99F	2-22	15	-	3	18	100	5	Die
CHA3024-QGG	2-22	15	-	3	18	100	5	QFN
CHA3024-FDB	2-22	14.5	-	3.25	17.5	100	5	Hermetic SMD
CHA3656-FAB	5.8-16	20	-	1.75	14.5	70	3.3	Hermetic SMD
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3666-FAB	6-16	21	1	1.8	17	80	4	Hermetic SMD
CHA3666-99F	6-17	21	0.5	1.8	17	80	4	Die
CHA3656-QAG	6-17	20	0.5	1.7	14	68	3	QFN
CHA1010-99F	7-11	32	1.1	1	5.5	30	5	Die
CHA2110-98F	7-12	19	-	1.2	11	45	4	Die
CHA2110-QDG	7-12	19	-	1.2	10	45	4	QFN
CHA2063a99F	7-13	19	2	2	8	40	4	Die
CHA2066-99F	10-16	16	0.5	2	10	50	4	Die
CHA2066-QAG	10-16	16	1	2.5	10	50	4	QFN
CHA2266-99F	12.5-17	34	0.5	2.5	14.5	130	4	Die
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN
CHA3689-99F	12.5-30	26	2	2	15	90	4	Die
CHA2069-FAB	16-32	22	1	2.5	10	55	4.5	Hermetic SMD
CHA2090-99F	17-24	23	1	2	10	55	4.5	Die
CHA2069-QDG	18-31	20	2	3	10.5	65	4.5	QFN
CHA2069-99F	18-31	22	1	2.5	10	55	4.5	Die
CHA2092b99F	18-32	22	2.5	2.5	10	60	3.5	Die
CHA2411-QDG	20-25	26	0.5	2.5	-	43	5	QFN
CHA2190-99F	20-30	15	0.5	2.2	11	50	4	Die
CHA2193-99F	20-30	18	0.5	2	8	60	3.5	Die
CHA2441-QAG	21-26	25.5	+/- 0.25	2.5	12	50	3.3	QFN
CHA2362-98F	26-40	22	-	2	9	65	4	Die
CHA2595-QDG	27.5-43.5	19.5	-	2.3	11	61	3.3	QFN
CHA2494-98F	34-44	20	-	3	12	80	4	Die
CHA2494-QEG	34-44	22	1.5	3	12	80	4	QFN
CHA2091-99F	36-40	14	0.5	2.5	12	45	4	Die
CHA2094b99F	36-40	21	1.5	3	8	60	3.5	Die
CHA2095a99F	36-40	26	1	3.5	10	90	3.5	Die

AMPLIFIER – LNA ... continued

NEW

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA2391-99F	36-40	15	0.5	2.5	12	45	4	Die
CHA2394-99F	36-40	21	1.5	2.5	8	60	3.5	Die
CHA2395-99F	36-40	30	1.5	3	10	90	3.5	Die
CHA2194-99F	36-44	19	0.5	3	10	45	3.5	Die
CHA2157-99F	55-60	10	1	3.5	15	60	3.3	Die
CHA2159-99F	55-65	20	1	4	14	115	3.5	Die
CHA2080-98F	71-86	22	0.8	3.5	10	75	3.5	Die
CHA1077a98F	76-77	15	0.5	4.5	9	80	5	Die
CHA1008-99F	80-105	17	1	6.5	5	115	2.5	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4220-98F	0.5-20	17	28	20	23	120	6.5	Die
CHA4220-QGG	0.5-20	17	28	20	23	120	6.5	QFN
CHA3023-99F	1-18	14	-	17	-	95	5	Die
CHA4105-99F	2-4	23	-	24	25.5	180	5	Die
CHA4105-QDG	2-4	23	-	24	25.5	180	5	QFN
CHA3024-99F	2-22	15	30	18	20	100	5	Die
CHA3024-QGG	2-22	15	28	18	20	100	5	QFN
CHA3024-FDB	2-22	14.5	29	17.5	-	100	5	Hermetic SMD
CHA4107-99F	4.5-6.5	24.5	-	25	26	115	8	Die
CHA4107-QDG	4.5-6.5	22.5	-	25.5	26	115	8	QFN
CHA4314-98F	4.5-11.5	19	34	26	27	180	8	Die
CHA3664-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3665-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3565-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA4350-QDG	5.5-11.7	26	32	24	25	125	5.5	QFN
CHA3063-99F	5.5-23	19	28	18	21	160	4	Die
CHA5115-99F	8-12	25	-	28	29	190	8	Die
CHA5115-QDG	8-12	24	-	27.5	29	190	8	QFN
CHA5014-99F	8.5-11	20	-	29	30	230	8.5	Die
CHA5266-99F	10-16	23	36	26.5	27.5	360	5	Die
CHA5266-QDG	10-16	23	35	25.5	27	320	5	QFN

AMPLIFIER – MPA ... continued

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA5266-FAB	10-16	23.5	35.5	26	27.5	320	5	Hermetic SMD
CHA4253-FAB	17-21	26	33	23.5	24.5	230	4	Hermetic SMD
CHA4253aQQG	17-24	23	33	24	24.5	230	4	QFN
CHA5350-99F	17-24	26	35.5	26.5	27	300	6	Die
CHA3092-99F	20-33	22	29	20	-	300	3.5	Die
CHA2098b99F	20-40	19	-	16	16	150	3.5	Die
CHA3660-QQG	21-27.5	25	32	19	21	180	4	QFN
CHA3395-QDG	21-29.5	24	32	20	22	180	4	QFN
CHA3409-98F	25-45	23	26	19	20	100	4	Die
CHA3396-QDG	27-33.5	22	30	19	21	155	4	QFN
CHA3397-QDG	36-40.5	21	29	18	20	200	4	QFN
CHA3398-98F	36-43.5	24	29	18	19	200	4	Die
CHA3398-QDG	38-43.5	22	29	18	19	200	4	QFN
CHA3080-98F	71-76	16	25	19	21	280	3.5	Die
CHA3090-98F	81-86	13	23	17	19	280	3.5	Die

AMPLIFIER – ANALOG VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	Gain Control Range (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3024-99F	2-22	15	0.5	3	30	18	100	5	Die
CHA3024-QGG	2-22	15	-	3	30	18	100	5	QFN
CHA3024-FDB	2-22	14.5	-	3.25	30	17.5	100	5	Hermetic SMD
CHA4350-QDG	5.7-11.7	26	<0.4 (400MHz)	5.5	15	24	125	5.5	QFN
CHA2292-99F	16-24	26	1	2.8	20	11	160	5	Die
CHA4253-FAB	17-21	26	-	-	-	23.5	230	4	Hermetic SMD
CHA4253aQQG	17-24	23	1	7.5	15	24	230	4	QFN
CHA2097a99F	20-40	18	1.5	-	12	14	140	3.5	Die
CHA3660-QQG	21-27.5	25	1	4	15	19	180	4	QFN
CHA3395-QDG	21-29.5	24	0.5	4.5	15	20	180	4	QFN
CHA2293-99F	24-30	24	1.5	3	15	12	160	5	Die
CHA3396-QDG	27-33.5	22	1.5	4.5	15	19	155	4	QFN
CHA2595-QDG	32-44	21	-	2.4	-	11	60	3.3	QFN
CHA3397-QDG	36-40.5	21	1	7	15	18	200	4	QFN
CHA3398-QDG	38-43.5	22	1	7	15	18	200	4	QFN
CHA2080-98F	71-86	22	0.8	3.5	12	10	75	3.5	Die

ATTENUATOR – ANALOG

NEW

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT3091aQAG	DC-12	3	20	15	QFN
CHT3091-FAB	DC-14	2.5	20.5	15	Hermetic SMD
CHT4660-QAG	DC-16	2	30	24	QFN
CHT3091a99F	DC-40	3	17	15	Die
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD
CHT4694-QAG	25-40	4	22	22	QFN
CHT4694-99F	25-45	4	24	22	Die
CHT4699-QDG	36-44	4	30	20	QFN

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT4012a98F	DC-6	6	31.5	2.5	+/-0.5	20	0/3.3 or 5	Die
CHT4012-QDG	DC-6	6	31.5	2.5	-0.7/+0.4	20	0/3.3 or 5	QFN
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die
CHT4016-QEG	4-14	6	31.5	7	+/-0.8	23	-5/0	QFN
CHT4016-99F	4-16	6	31.5	6.5	-1.5/1	18	-5/0	Die

CORE CHIP RX - TX

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Number of Bit Atten.	Number of Bit Phase	Bias (mA)	Bias (V)	Case
CHA4102-QEG	2-4	-	20	-	23.5	-	6	-	200	5	QFN
CHP1102-98F	2.7-3.4	10	-	13	-	5.8	-	6	100	5	Die
CHP1102-QGG	2.7-3.4	10	-	13	-	5.8	-	6	100	5	QFN
CHC3014-99F	8-12	13.5	25	16.5	20	5.8	6	6	350	5	Die
CHC2442-QPG	24-24.5	37	VCO incl.	-	13.5	11.5	5	-	225	3.3	QFN
CHC2444-QBB	24.25-24.5	37	VCO incl.	-	13	11.5	5	-	315	3.3	QFN

Part Number	RF Bandwidth (GHz)	Downlink Sensitivity (dBm)	Downlink Freq (KHz)	Uplink Conversion Gain (dB)	Uplink Freq (MHz)	Standby Current (μA)	Case
CHR2270-QRG	5.72-5.88	-	250-500	-	DC-30	6.5	QFN

Products

Foundry

GaN Power Transistors



Chipset Solutions

DETECTOR

Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a98F	5-44	-	30	Wide-Band	Die
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1260-98F	10-27	0.8	30	Bidirectionnal	Die
CHE1260-QAG	10-27	1	30	Bidirectionnal	QFN
CHE1270-QAG	10-44	-	30	Wide-Band	QFN

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3762-QDG	5.5-9	4-12	DC-3.5	14	1.7	-5	5	100	3	QFN
CHR3861-QEG	5.9-9	3-12.5	DC-3.5	12	2.5	-7	0	380	4	QFN
CHR3662-QDG	7-16	4.5-19.5	DC-3.5	13	3	-8	0	280	4.5	QFN
CHR3362-QEG	10-16	6.5-19.5	DC-3.5	13	3.2	-6	0	310	4	QFN
CHR3352-QEG	12-16	8.5-19.5	DC-3.5	13	2.7	-6	0	250	4	QFN
CHR3763-QDG	12-16	8.5-19.5	DC-3.5	12	2.3	-8	5	80	3	QFN
CHR2291-99F	12-17	5.25-7.75	DC-1.5	10	3.5	-8	10	130	3.5	Die
CHR3663-QEG	17-24	7-14	DC-3.5	11	3.5	-5	0	380	4.5	QFN
CHR3364-QEG	17-24	6.5-14	DC-3.5	11	2.7	-7	0	320	4	QFN
CHR3664-QEG	17-27	7-15	DC-3.5	12	3.3	-8	0	320	4	QFN
CHR3693-99F	21-26.5	9-14	DC-3.5	15	3.2	-10	2	160	4	Die
CHR3693-QDG	21-26.5	9-14	DC-3.5	14	3	-12	2	160	4	QFN
CHR3693-FAB	21-26.5	9-14	DC-3.5	13	2.5	-12	2	160	4	Hermetic SMD
CHR3764-QEG	21-27	8.5-15	DC-3.5	14	3.1	-7	0	320	4	QFN
CHR2411-QDG	22-24.5	22-24.5	DC-0.001	23	7	-21	5	60	5	QFN
CHR2421-QEG	23.75-24.5	23.75-24.5	DC-0.001	22	7	-20	2	165	5	QFN
CHR2295-99F	24-30	12-15	DC-1.5	11	3.5	-10	10	120	3.5	Die
CHR2296-99F	36-40	17-20	DC-1.5	11	5	-10	10	110	3.5	Die
CHR3394-QEG	37-40	17.5-21	DC-3.5	13	3.5	-7	0	250	4	QFN
CHR3894-98F	37-40	17.5-21	DC-3.5	13	4.5	-6	0	250	4	Die
CHR3894-QEG	37-40	17.5-21	DC-3.5	13	4	-6	0	250	4	QFN
CHR1080a98F	71-86	34.5-44	DC-12	8	5	-10	1	175	3.5	Die

RF FRONT-END

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Bias (mA)	Bias (V)	Case
CHC6053-QQA	24.25-27.5	18	33	10	32.5	3.5	150	18;4	QFN

GaN POWER TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB)@Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHKA011aSXA	Up to 1.5	23.5 @ 0.44	130	75 @ 0.5	0.64	50	Ceramic Metal Flange
CHKA012a99F	Up to 4	19 @ 3	140	65 @ 3	0.65	50	Die
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package
CHK8101a99F	Up to 6	14 @ 6	20	60 @ 6	0.1	50	Die
CHK9013-99F	Up to 8	18 @ 6	88	65 @ 6	1.1	30	Die
CHK8013-99F	Up to 10	17 @ 6	14	70 @ 6	0.18	30	Die
CHK9014-99F	Up to 13	13 @ 12	60	50 @ 12	0.7	30	Die
CHK8015-99F	Up to 18	12 @ 15	20	50 @ 15	0.2	30	Die

INTERNALLY MATCHED GaN POWER TRANSISTOR

Part Number	Frequency range (GHz)	Small signal Gain (dB)	Power (W)	Associated Gain (dB)	PAE (%)	DC Bias	Case
CHZ180AaSEB	1.2-1.4	20	200	> 14	52	VDS 45V@ID_Q 1.3A	Ceramic Metal Flange
CHZ015AaQEG	1.2-1.4	17.2	15	> 14	> 55	VDS 45V@ID_Q 100mA	QFN Plastic Package
CHZ8012-QJA	2.6-3.4	16.5	12	11	54	VDS 30V@ID_Q 180mA	QFN Plastic Package
CHZ9012-QFA	2.7-3.4	16	65	12	55	VDS 30V@ID_Q 800mA	QFN Plastic Package

MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1290-99F	20-30	10-15	DC-6	-10	0	-4	33	4	Die
CHM1291-99F	25-32	12-15.5	0.1-3	-11	0	5	55	3.5	Die
CHR2294-99F	25-35	11-19	DC-3	-11	2.5	9	55	4	Die
CHM1294-99F	35-45	16-24	DC-3	-11	0	10	60	4	Die
CHM1298-99F	55-65	27.5-32.5	DC-5	-12	0	10	90	3.5	Die
CHM1080-98F	71-86	34.5-44	DC-12	-11	10	2	90	3.5	Die
CHM2179b98F	76-77	76-77	DC-0.1	-8	0	5.5	1	4.5	Die
CHM2378a99F	76-77	76-77	DC-0.1	-7.5	0	7	1.5	4.5	Die
CHM1270a98F	76-77	76-77	DC-0.1	-7.5	0	15	-	-	Die

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2193-99F	X2	6.25-8.25	12.5-16.5	12	14	60	3.5	Die
CHX2193-FAB	X2	6.25-8.25	12.5-16.5	10	14	60	3.5	Hermetic SMD
CHX2095a99F	X4	6.25-8.25	25-33	12	11	75	3.5	Die
CHX2089-99F	X2	8-11.5	16-23	12	15	60	3.5	Die
CHX2092a99F	X4	9-10	36-40	12	11	80	3.5	Die
CHX2090-99F	X2	11-13	22-26	12	15	50	3.5	Die
CHX2090-QDG	X2	11-13	22-26	14	12	65	3.5	QFN
CHX1191-QDG	X3	11-14.5	33-43.5	1	6	80	5	QFN
CHX1191-98F	X3	11.25-14.5	33.75-43.5	-1	6	80	5	Die
CHU3377-98F	X6	12.67-12.83	76-77	4	15	210	4.5	Die
CHX3068-QDG	X2	14-15	28-30	0	20	270	4	QFN
CHX2091-99F	X2	17-20	34-40	12	12	50	3.5	Die
CHX1162-QDG	X2	17.5-21.5	35-43	1	8	50	5	QFN
CHX2192-99F	X2	27-33	54-66	12	11	130	3.5	Die
CHU2277a98F	X2	38-38.5	76-77	5	13	180	4.5	Die
CHU2277-99F	X2	38-38.5	76-77	5	13	180	4.5	Die

OSCILLATOR – VCO

10

Part Number	Central Output Freq (GHz)	Tuning Bandwidth (GHz)	Noise @ 100KHz (dBc/Hz)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHV1203a98F	2.6	0.4	-108	8	50	3	Die
CHV1203-FAB	2.8	0.4	-108	8	50	3	Hermetic SMD
CHV1206a98F	5.725	0.75	100	8.5	75	3	Die
CHV2270-98F	12.7	1.2	-100	14	150	4.5	Die
CHV2411aQDG	24.125	2	-90	16	220	5	QFN
CHV3241-QDG	24.125	2	-94	16	225	5	QFN
CHV2421-QDG	24.25	2	-90	15	233	5	QFN
CHV2243a99F	38.2	3	-65	8	110	4.5	Die
CHV2240-99F	38.2	-	-100	9	120	4.5	Die

PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control Voltage (V)	Case
CHP6013-SRF	1.2-1.4	6	360	8.5	5	-	-6/0	Ceramic
CHP3010a98F	1.2-1.4	6	360	7	-1/+3	24	0/3.3 or 5	Die

PHASE SHIFTER ... continued

NEW

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (° p-p)	P-1dB IN (dBm)	Control Voltage (V)	Case
CHP3010-QFG	1.2-1.4	6	360	7	-1/+3	24	0/3.3 or 5	QFN
CHP1102-98F	2.7-3.4	6	360	-10	5	3	0/3.3 or 5	Die
CHP1102-QGG	2.7-3.4	6	360	-10	5	3	0/3.3 or 5	QFN
CHP4012a98F	2.7-3.5	6	360	6	-2/+4	24.5	0/3.3 or 5	die
CHP4012-QEG	2.7-3.5	6	360	6	-2/+4	24.5	0/3.3 or 5	QFN
CHP4014-98F	5-6	6	360	6	4	26	0/3.3 or 5	Die
CHP4014-QEG	5-6	6	360	6	4	26	0/3.3 or 5	QFN
CHP4511-99F	6-18	4	360	13	10	23	-5/0	Die
CHP4010-99F	7-9	6	360	9	-1	24.5	-5 or -3.3 / 0	Die
CHP3015-QDG	8.5-10.5	6	360	8	-2/+8	23.5	3.3 or 5	QFN
CHP3015-99F	8.5-11.5	6	360	7.5	-3/+5	24	0/3.3 or 5	Die


SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5104-99F	DC-4	0.5	30	35	reflective	Die
CHS5104-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5105-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5104-FAB	DC-6	0.6	30	30	reflective	Hermetic SMD
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS5100-99F	DC-20	2.1	20	30	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die
CHS2411-QDG	23-26	2.9	23.5	35	reflective	QFN

GaAs TRANSISTOR

Part Number	RF Bandwidth (GHz)	Gain (dB)	Noise Figure (dB)	Case
EC2612-99F	DC-40	9.5	1.5	Die

Foundry open processes

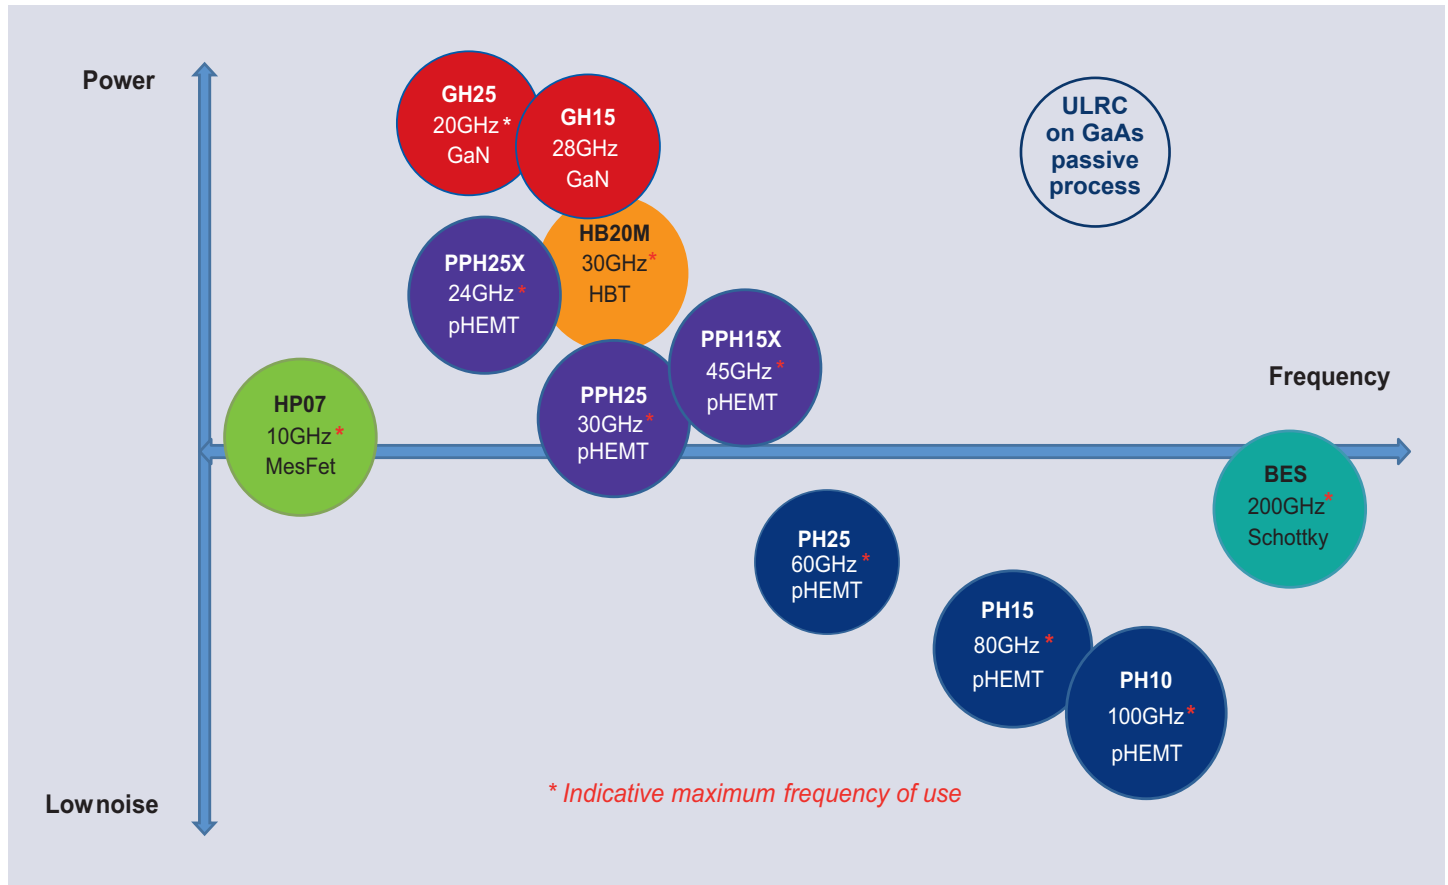

GaAs PHEMT PROCESS

	Power Density (mW/mm)	Gate Length (μm)	Ids@gm Max (mA/mm)	Ids Sat (mA/mm)	V _{BDS} (>V)	Cut off Freq (GHz)	V Pinch (V)	Gm Max (mS/mm)	Noise/Gain _{ass} @Freq (dB-dB-GHz)	Noise/Gain _{ass} @Freq (dB-dB-GHz)
PH25 - Low noise	250	0.25	200	500	6	90	-0.8	560	0.6-13-10	2-8-40
PH15 - Low noise	300	0.15	220	550	4.5	110	-0.7	640	0.5-14-10	1.9-6-60
PH10 - Low noise	250	0.10	280	-	5	130	-0.45	750	1.3-7-40	2.3-4.5-70
PPH25 - Power	700	0.25	200	500	12	50	-0.9	450	0.6-12-10	-
PPH25X - Power	900	0.25	170	450	18	45	-0.9	400	-	-
PPH15X - Power	800	0.15	350	575	12	70	-0.95	480	1.8-6-40	-

GaAs HBT PROCESS

	Power Density (W/mm)	Emitter Width (μm)	Ic Max (mA/ μm^2)	V _{BCE} (>V)	Cut off Freq (GHz)	Beta
HB20M - VCO	2	2	0.3	14	30	50

GaAs MESFET PROCESS

	Power Density (mW/mm)	Gate Length (μm)	Ids@gm Max (mA/mm)	Ids Sat (mA/mm)	Cut off Freq (GHz)	V Pinch (V)	Gm Max (mS/mm)
HP07	400	0.7	300	450	15	-4	110

13

GaAs SCHOTTKY PROCESS

	Gate Length (μm)	V _{AK} (<V)	Cut off Freq (THz)
BES	1	-5	3


GaN ON SiC HEMT PROCESS

	Power Density (W/mm)	Gate Length (μm)	Idss mA/mm	Ids Sat (mA/mm)	V _{BDS} (V)	Cut off Freq (GHz)	V Pinch (V)	Gm Max (mS/mm)	Noise/Gain@freq (dB-dB-GHz)
GH25_10	4	0.25	750	900	>100	30	-3	300	1.8-11-15
GH15	3.5	0.15	1200	1400	>70	>35	-3.2	390	15-11-15

GaN RF PRODUCTS

From transistors to packaged MMICs

Unmatched or fully matched solutions in bare die, SMD or flange ceramic packages

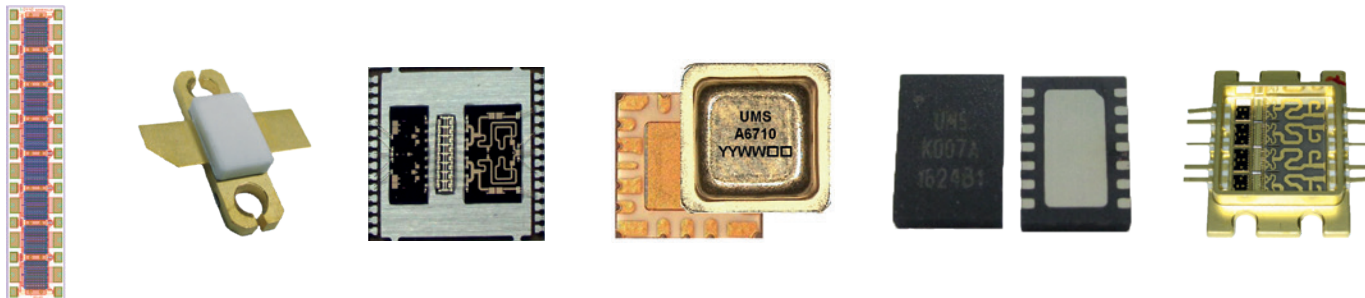

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Sat. Output Power (dBm)	PAE (%)	Bias (mA)	Bias (V)	Case
CHA7618-99F	5-18	30	40 @ 8dB comp	24 @ 8dB comp	800	18	Die
CHA7060-QWA	5.7-8.5	20	40	32 @ 10dBm	700	20	QFN
CHA8054-99F	7.7-8.6	27	43.6	50 @ 7dB comp	900	28	Die
CHA6710-99F	8-12.75	23.5	37.4	36 @ Psat	200	25	Die
CHA6710-FAB	8-12.75	22.5	37	35 @ Psat	200	25	Hermetic SMD
CHA8710a99F	8.5-10.5	28.5	44	44 @ Psat	750	25	Die
CHA8610-99F	8.5-11	24	41.8	40 @ Psat	680	30	Die
CHA8611-99F	8.5-11	24	42.5	43 @ Psat	800	25	Die
CHA8212-99F	8.5-11.5	35	44.5	36 @ 7dB comp	750	28	Die

GaN HEMT TRANSISTOR DIE

Part Number	Operating Frequency (GHz)	Glin (dB) @ Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHKA012a99F	Up to 4	19 @ 3	140	65 @ 3	0.65	50	Die
CHK8101a99F	Up to 6	14 @ 6	20	60 @ 6	0.1	50	Die
CHK9013-99F	Up to 8	18 @ 6	88	65 @ 6	1.1	30	Die
CHK8013-99F	Up to 10	17 @ 6	14	70 @ 6	0.18	30	Die
CHK9014-99F	Up to 13	13 @ 12	60	50 @ 12	0.7	30	Die
CHK8015-99F	Up to 18	12 @ 15	20	50 @ 15	0.2	30	Die

GaN HEMT PACKAGED TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB) @ Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHKA011aSXA	Up to 1.5	23.5 @ 0.44	130	75 @ 0.5	0.64	50	Ceramic Metal Flange
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package

INTERNALLY MATCHED GaN POWER TRANSISTORS

Part Number	Frequency range (GHz)	Small signal Gain (dB)	Power (W)	Associated Gain (dB)	PAE %	DC Bias	Case
CHZ180AaSEB	1.2-1.4	20	200	> 14	52	VDS 45V@ID_Q 1.3A	Ceramic Metal Flange
CHZ015AaQEG	1.2-1.4	17.2	15	> 14	> 55	VDS 45V@ID_Q 100mA	QFN Plastic Package
CHZ8012-QJA	2.6-3.4	16.5	12	11	54	VDS 30V@ID_Q 180mA	QFN Plastic Package
CHZ9012-QFA	2.7-3.4	16	65	12	55	VDS 30V@ID_Q 800mA	QFN Plastic Package

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die



Freq (GHz)	3.4 - 4.2	24	26	28	32	39	42	47	60
GaN Transistor 	15W								
GaN Transistor 	15-90W								
LNA 						Noise 2dB		Noise 3.5dB	
MPA 						Plin = 23 dBm			
HPA 						Plin = 33 dBm			
Front-End 				Plin = 23 dBm					

RF FRONT-END

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Bias (mA)	Bias (V)	Case
CHC6053-QQA	24.25-27.5	18	33	10	32.5	3.5	150	18;4	QFN

GaN POWER TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB)@Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package
CHK8101a99F	Up to 6	14 @ 6	20	60 @ 6	0.1	50	Die
CHK9013-99F	Up to 8	18 @ 6	88	65 @ 6	1.1	30	Die

INTERNALLY MATCHED GaN POWER TRANSISTOR

Part Number	Frequency range (GHz)	Small signal Gain (dB)	Power (W)	Associated Gain (dB)	PAE (%)	DC Bias	Case
CHZ8012-QJA	2.6-3.4	16.5	12	11	54	VDS 30V@ID_Q 180mA	QFN Plastic Package
CHZ9012-QFA	2.7-3.4	16	65	12	55	VDS 30V@ID_Q 800mA	QFN Plastic Package

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN
CHA2069-QDG	18-31	20	2	3	10.5	65	4.5	QFN
CHA2362-98F	26-40	22	-	2	9	65	4	Die
CHA2595-QDG	27.5-43.5	19.5	-	2.3	11	61	3.3	QFN
CHA2494-QEG	34-44	22	1.5	3	12	80	4	QFN
CHA2157-99F	55-60	10	1	3.5	15	60	3.3	Die
CHA2159-99F	55-65	20	1	4	14	115	3.5	Die

AMPLIFIER – MPAs

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3395-QDG	21-29.5	24	32	20	22	180	4	QFN
CHA3409-98F	25-45	23	26	19	20	100	4	Die
CHA3396-QDG	27-33.5	22	30	19	21	155	4	QFN
CHA3397-QDG	36-40.5	21	29	18	20	200	4	QFN
CHA3398-98F	36-43.5	24	29	18	19	200	4	Die
CHA3398-QDG	38-43.5	22	29	18	19	200	4	QFN

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA7060-QWA	5.7-8.5	20	46	36	40	32 @ 10dBm	700	20	QFN
CHA6652-QXG	21-27.5	20	41	32.5	33	25 @ Psat	1300	6	QFN
CHA6653-QXG	27-33.5	20	38	32	33	23 @ Psat	900	6	QFN
CHA5659-QXG	36-43.5	20	38.5	29.5	30	15 @ Psat	800	6	QFN
CHA5659-98F	36-43.5	22	38	30	31	15 @ Psat	800	6	Die
CHA6194-QXG	37- 40	20	38	30	31	-	800	6	QFN

L-Band Chipset

Switch

CHS7012-99F
CHS5104-FAB
CHS5104-99F
CHS5104-QAG
CHS5105-QAG
CHS5100-99F

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4012a98F
CHT4012-QDG

Analog Attenuator

CHT3091-FAB

MPA


CHA3801-FAB
CHA3801-99F
CHA3801-QDG
CHA3023-99F
CHA4220-QGG

LNA

CHA3801-FAB
CHA3801-99F
CHA3801-QDG
CHA3023-99F

Phase Shifter

CHP3010a98F
CHP3010-QFG
CHP6013-SRF

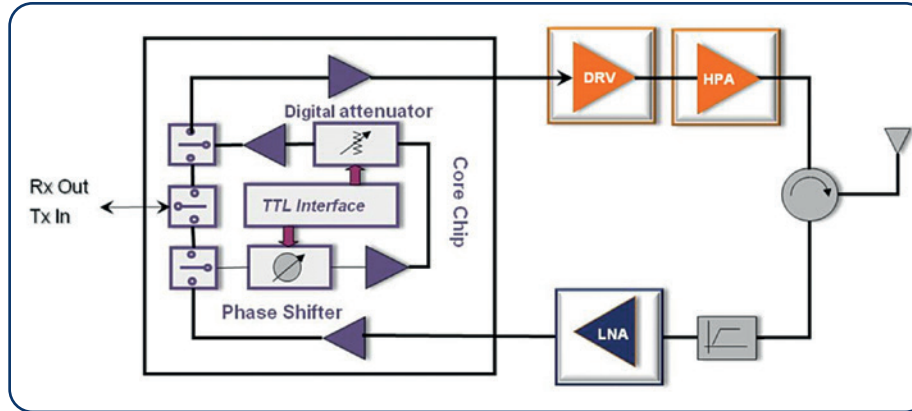

HPA

CHK015AaQIA
CHKA011aSXA
CHKA012a99F
CHZ015AaQEG
CHZ180A-SEB

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3801-99F	1-2	28	0.5	1.5	15	70	5	Die
CHA3801-QDG	1-2	28	0.5	1.5	15	70	5	QFN
CHA3801-FAB	1-2	28	0.5	1.5	16	70	5	Hermetic SMD

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4220-QGG	0.5-20	17	28	20	23	120	6.5	QFN
CHA3023-99F	1-18	14	-	17	-	95	5	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT3091-FAB	DC-14	2.5	20.5	15	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT4012a98F	DC-6	6	31.5	2.5	+/-0.5	20	0/3.3 or 5	Die
CHT4012-QDG	DC-6	6	31.5	2.5	-0.7/+0.4	20	0/3.3 or 5	QFN
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die

GaN POWER TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB)@Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHKA011aSXA	Up to 1.5	23.5 @ 0.44	130	75 @ 0.5	0.64	50	Ceramic Metal Flange
CHKA012a99F	Up to 4	19 @ 3	140	65 @ 3	0.65	50	Die
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package

INTERNALLY MATCHED GaN POWER TRANSISTOR

Part Number	Frequency range (GHz)	Small signal Gain (dB)	Power (W)	Associated Gain (dB)	PAE (%)	DC Bias	Case
CHZ180AaSEB	1.2-1.4	20	200	> 14	52	VDS 45V@ID_Q 1.3A	Ceramic Metal Flange
CHZ015AaQEG	1.2-1.4	17.2	15	> 14	> 55	VDS 45V@ID_Q 100mA	QFN Plastic Package

PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control voltage (V)	Case
CHP6013-SRF	1.2-1.4	6	360	8.5	5	-	-6/0	Ceramic
CHP3010a98F	1.2-1.4	6	360	7	-1/+3	24	0/3.3 or 5	Die
CHP3010-QFG	1.2-1.4	6	360	7	-1/+3	24	0/3.3 or 5	QFN

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5104-99F	DC-4	0.5	30	35	reflective	Die
CHS5104-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5105-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5104-FAB	DC-6	0.6	30	30	reflective	Hermetic SMD
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS5100-99F	DC-20	2.1	20	30	reflective	Die

S-Band Chipset

Switch

CHS5100-99F
CHS5104-99F
CHS5104-QAG
CHS5104-FAB
CHS5105-QAG
CHS7012-99F

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4012a98F
CHT4012-QDG

Phase Shifter

CHP4012a98F
CHP4012-QEG

MPA

CHA3023-99F
CHA4105-99F
CHA4105-QDG

Analog Attenuator


CHT3091-FAB

VCO

CHV1203-FAB
CHV1203a98F

Core chip

CHA4102-QEG
CHP1102-98F
CHP1102-QGG

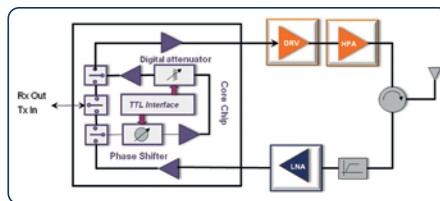

HPA

CHK015AaQIA
CHZ8012-QJA
CHZ9012-QFA

LNA

CHA3024-FDB
CHA3024-99F
CHA3054-QGG
CHA3218-99F

AMPLIFIER – DIGITAL VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Noise Figure (dB)	Dynamic Range (dB)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4102-QEG	2-4	20	-	31.5	23.5	24.5	200	5	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3218-99F	2-18	24	1	2	15	120	4	Die
CHA3024-99F	2-22	15	-	3	18	100	5	Die
CHA3024-QGG	2-22	15	-	3	18	100	5	QFN
CHA3024-FDB	2-22	14.5	-	3.25	17.5	100	5	Hermetic SMD

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3023-99F	1-18	14	-	17	-	95	5	Die
CHA4105-99F	2-4	23	-	24	25.5	180	5	Die
CHA4105-QDG	2-4	23	-	24	25.5	180	5	QFN

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT3091-FAB	DC-14	2.5	20.5	15	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT4012a98F	DC-6	6	31.5	2.5	+/-0.5	20	0/3.3 or 5	Die
CHT4012-QDG	DC-6	6	31.5	2.5	-0.7/+0.4	20	0/3.3 or 5	QFN
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die

GaN POWER TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB)@Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package

INTERNALLY MATCHED GaN POWER TRANSISTOR

Part Number	Frequency range (GHz)	Small signal Gain (dB)	Power (W)	Associated Gain (dB)	PAE (%)	DC Bias	Case
CHZ8012-QJA	2.6-3.4	16.5	12	11	54	VDS 30V@ID_Q 180mA	QFN Plastic Package
CHZ9012-QFA	2.7-3.4	16	65	12	55	VDS 30V@ID_Q 800mA	QFN Plastic Package

OSCILLATOR – VCO

Part Number	Central Output Freq (GHz)	Tuning Bandwidth (GHz)	Noise @ 100KHz (dBc/Hz)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHV1203a98F	2.6	0.4	-108	8	50	3	Die
CHV1203-FAB	2.8	0.4	-108	8	50	3	Hermetic SMD

21

PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control voltage (V)	Case
CHP1102-98F	2.7-3.4	6	360	-10	5	3	0/3.3 or 5	die
CHP1102-QGG	2.7-3.4	6	360	-10	5	3	0/3.3 or 5	QFN
CHP4012a98F	2.7-3.5	6	360	6	-2/+4	24.5	0/3.3 or 5	die
CHP4012-QEG	2.7-3.5	6	360	6	-2/+4	24.5	0/3.3 or 5	QFN

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5104-99F	DC-4	0.5	30	35	reflective	Die
CHS5104-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5105-QAG	DC-4	0.5	30	35	reflective	QFN
CHS5104-FAB	DC-6	0.6	30	30	reflective	Hermetic SMD
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS5100-99F	DC-20	2.1	20	30	reflective	Die

C-Band Chipset

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4012a98F
CHT4012-QDG
CHT4016-99F
CHT4016-QEG

Switch

CHS5100-99F
CHS5104-FAB
CHS7012-99F
CHS8618-99F

Analog Attenuator

CHT3091-FAB
CHT4690-FAB
CHT4690-99F
CHT4690-QAG

MPA


CHA4314-98F
CHA3024-FDB
CHA4107-99F
CHA4107-QDG
CHA3024-QGG
CHA3024-99F

HPA

CHK8013-99F
CHK015AaQIA
CHK8101a99F
CHA8012-99F
CHK9013-99F
CHK9014-99F

Phase Shifter

CHP4014-98F
CHP4014-QEG

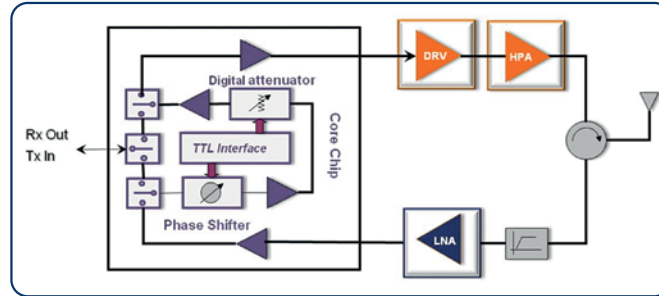

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA8012-99F	5.2-6	22	-	-	41.5	43 @ 3dB comp	2100	8	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3024-QGG	2-22	15	28	18	20	100	5	QFN
CHA3024-FDB	2-22	14.5	29	17.5	-	100	5	Hermetic SMD
CHA3024-99F	2-22	15	30	18	20	100	5	Die
CHA4107-99F	4.5-6.5	24.5	-	25	26	115	8	Die
CHA4107-QDG	4.5-6.5	22.5	-	25.5	26	115	8	QFN
CHA4314-98F	4.5-11.5	19	34	26	27	180	8	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT3091-FAB	DC-14	2.5	20.5	15	Hermetic SMD
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT4012a98F	DC-6	6	31.5	2.5	+/-0.5	20	0/3.3 or 5	Die
CHT4012-QDG	DC-6	6	31.5	2.5	-0.7/+0.4	20	0/3.3 or 5	QFN
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die
CHT4016-QEG	4-14	6	31.5	7	+/-0.8	23	-5/0	QFN
CHT4016-99F	4-16	6	31.5	6.5	-1.5/1	18	-5/0	Die

GaN POWER TRANSISTOR

Part Number	Operating Frequency (GHz)	Glin (dB)@Freq (GHz)	Saturated Power (W)	PAE (%) @ Freq (GHz)	Bias (A)	Bias (V)	Case
CHK015AaQIA	Up to 6	13 @ 6	15	50 @ 6	0.1	50	QFN Plastic Package
CHK8101a99F	Up to 6	14 @ 6	20	60 @ 6	0.1	50	Die
CHK9013-99F	Up to 8	18 @ 6	88	65 @ 6	1.1	30	Die
CHK8013-99F	Up to 10	17 @ 6	14	70 @ 6	0.18	30	Die
CHK9014-99F	Up to 13	13 @ 12	60	50 @ 12	0.7	30	Die


PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control voltage (V)	Case
CHP4014-98F	5-6	6	360	6	4	26	0/3.3 or 5	die
CHP4014-QEG	5-6	6	360	6	4	26	0/3.3 or 5	QFN

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5104-FAB	DC-6	0.6	30	30	reflective	Hermetic SMD
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS5100-99F	DC-20	2.1	20	30	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die

X-Band Chipset

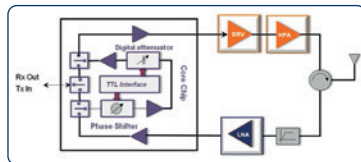

Phase Shifter

CHP3015-99F
CHP3015-QDG

Core chip

CHC3014-99F

HPA

CHA6710-FAB
CHA8054-99F
CHA8212-99F
CHA6005-QEG
CHA6710-99F
CHA7114-99F
CHA7215-99F
CHA8100-99F
CHA8610-99F
CHA8611-99F
CHA8710a99F

LNA

CHA3656-FAB
CHA2110-98F
CHA2110-QDG
CHA1010-99F
CHA3666-99F
CHA3666-QAG
CHA3666-FAB
CHA3656-QAG

MPA

CHA4350-QDG
CHA4314-98F
CHA5014-99F
CHA5115-99F
CHA5115-QDG
CHA5266-FAB
CHA5266-99F
CHA5266-QDG

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4016-99F
CHT4016-QEG

Analog Attenuator

CHT3091-FAB
CHT4690-99F
CHT4690-FAB
CHT4690-QAG

Switch

CHS5100-99F
CHS7012-99F
CHS8618-99F

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA8054-99F	7.7-8.6	27	-	-	43.6	50 @ 7dB comp	900	28	Die
CHA6005-QEG	8-12	19.5	-	31.5	32	35 @ 3dB comp	420	8	QFN
CHA6710-99F	8-12.75	23.5	-	-	37.4	36 @ Psat	200	25	Die
CHA6710-FAB	8-12.75	22.5	-	-	37	35 @ Psat	200	25	Hermetic SMD
CHA8710a99F	8.5-10.5	28.5	-	-	44	44 @ Psat	750	25	Die
CHA8611-99F	8.5-11	24	-	-	42.5	43 @ Psat	800	25	Die
CHA8610-99F	8.5-11	24	-	-	41.8	40 @ Psat	680	30	Die
CHA8212-99F	8.5-11.5	35	-	35	44.5	36 @ 7dB comp	750	28	Die
CHA7114-99F	8.5-11.5	20	-	-	39.8	40 @ 4dB comp	2000	8	Die
CHA7215-99F	8.5-11.5	28	-	-	39.5	34 @ 4dB comp	2300	8	Die
CHA8100-99F	9-10.5	18	-	-	41	40 @ 3dB comp	2100	9	Die

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3656-FAB	5.8-16	20	-	1.75	14.5	70	3.3	Hermetic SMD
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3666-FAB	6-16	21	1	1.8	17	80	4	Hermetic SMD
CHA3656-QAG	6-17	20	0.5	1.7	14	68	3	QFN
CHA3666-99F	6-17	21	0.5	1.8	17	80	4	Die
CHA1010-99F	7-11	32	1.1	1	5.5	30	5	Die
CHA2110-98F	7-12	19	-	1.2	11	45	4	Die
CHA2110-QDG	7-12	19	-	1.2	10	45	4	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4314-98F	4.5-11.5	19	34	26	27	180	8	Die
CHA4350-QDG	5.5-11.7	26	32	24	25	125	5.5	QFN
CHA5115-99F	8-12	25	-	28	29	190	8	Die
CHA5115-QDG	8-12	24	-	27.5	29	190	8	QFN
CHA5014-99F	8.5-11	20	-	29	30	230	8.5	Die
CHA5266-FAB	10-16	23.5	35.5	26	27.5	320	5	Hermetic SMD
CHA5266-99F	10-16	23	36	26.5	27.5	360	5	Die
CHA5266-QDG	10-16	23	35	25.5	27	320	5	QFN

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT3091-FAB	DC-14	2.5	20.5	15	Hermetic SMD
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die
CHT4016-QEG	4-14	6	31.5	7	+/-0.8	23	-5/0	QFN
CHT4016-99F	4-16	6	31.5	6.5	-1.5/1	18	-5/0	Die

25

CORE CHIP RX - TX

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Number of Bit Attenu.	Number of Bit Phase	Bias (mA)	Bias (V)	Case
CHC3014-99F	8-12	13.5	25	16.5	20	5.8	6	6	350	5	Die


PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control Voltage (V)	Case
CHP3015-QDG	8.5-10.5	6	360	8	-2/+8	23.5	3.3 or 5	QFN
CHP3015-99F	8.5-11.5	6	360	7.5	-3/+5	24	0/3.3 or 5	die

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS7012-99F	DC-12	1.4	40.5	35	reflective	Die
CHS5100-99F	DC-20	2.1	20	30	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die

Ku-Band Chipset

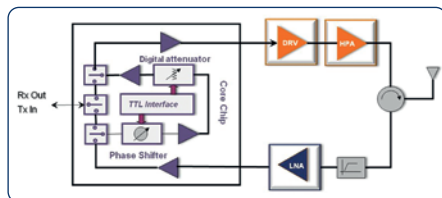

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4016-99F
CHT4016-QEG

MPA

CHA3024-FDB
CHA3024-99F
CHA3024-QGG
CHA3063-99F
CHA4220-98F

LNA

CHA3656-FAB
CHA3218-99F
CHA3666-99F
CHA3666-FAB
CHA3666-QAG
CHA3656-QAG

Analog Attenuator

CHT4690-FAB
CHT4690-99F
CHT4690-QAG

Switch

CHS5100-99F
CHS8618-99F

Multiplier

CHX2193-FAB
CHX2193-99F

Phase Shifter

CHP4511-99F

Rx

CHR3662-QDG

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3218-99F	2-18	24	1	2	15	120	4	Die
CHA3656-FAB	5.8-16	20	-	1.75	14.5	70	3.3	Hermetic SMD
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3666-FAB	6-16	21	1	1.8	17	80	4	Hermetic SMD
CHA3666-99F	6-17	21	0.5	1.8	17	80	4	Die
CHA3656-QAG	6-17	20	0.5	1.7	14	68	3	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4220-98F	0.5-20	17	28	20	23	120	6.5	Die
CHA4220-QGG	0.5-20	17	28	20	23	120	6.5	QFN
CHA3024-99F	2-22	15	30	18	20	100	5	Die
CHA3024-FDB	2-22	14.5	29	17.5	-	100	5	Hermetic SMD
CHA3024-QGG	2-22	15	28	18	20	100	5	QFN
CHA3063-99F	5.5-23	19	28	18	21	160	4	Die
CHA5266-QDG	10-16	23	35	25.5	27	320	5	QFN
CHA5266-FAB	10-16	23.5	35.5	26	27.5	320	5	Hermetic SMD

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die
CHT4016-QEG	4-14	6	31.5	7	+/-0.8	23	-5/0	QFN
CHT4016-99F	4-16	6	31.5	6.5	-1.5/1	18	-5/0	Die

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3662-QDG	7-16	4.5-19.5	DC-3.5	13	3	-8	0	280	4.5	QFN

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2193-99F	X2	6.25-8.25	12.5-16.5	12	14	60	3.5	Die
CHX2193-FAB	X2	6.25-8.25	12.5-16.5	10	14	60	3.5	Hermetic SMD

PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (°p-p)	P-1dB IN (dBm)	Control Voltage (V)	Case
CHP4511-99F	6-18	4	360	13	10	23	-5/0	die

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5100-99F	DC-20	2.1	20	30	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die

Ka-Band chipset

Rx

CHM1290-99F
CHM1291-99F
CHR2294-99F
CHR2295-99F
CHR3693-FAB

Tx

CHM1290-99F
CHM1291-99F
CHR2294-99F

Analogue Attenuator

CHT4690-FAB
CHT4690-99F
CHT4690-QAG
CHT4694-99F
CHT4694-QAG

MPA

CHA3409-98F
CHA2098b99F
CHA3092-99F
CHA4253aQQG
CHA4253-FAB
CHA5350-99F

LNA


CHA2595-QDG
CHA2362-98F
CHA2069-99F
CHA2069-QDG
CHA2069-FAB
CHA2092b99F
CHA2190-99F
CHA3688aQDG
CHA2090-99F

Digital Attenuator

CHT3029-99F
CHT3029-QEG

RF Front-End

CHC6053-QQA

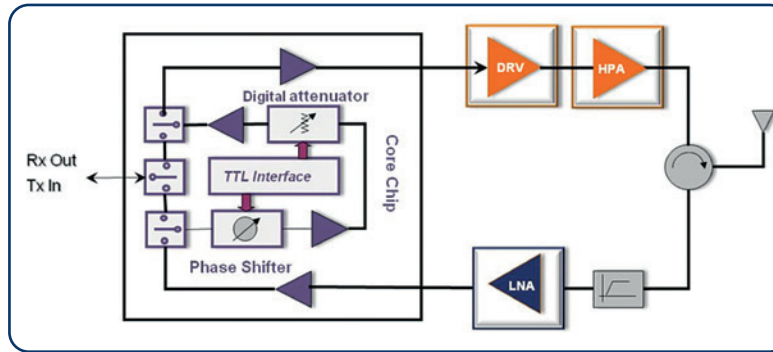

HPA

CHA6653-QXG

28

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA6653-QXG	27-33.5	20	38	32	33	23 @ Psat	900	6	QFN

RF FRONT-END

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Bias (mA)	Bias (V)	Case
CHC6053-QQA	24.25-27.5	18	33	10	32.5	3.5	150	18;4	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN
CHA2069-FAB	16-32	22	1	2.5	10	55	4.5	Hermetic SMD
CHA2069-QDG	18-31	20	2	3	10.5	65	4.5	QFN
CHA2069-99F	18-31	22	1	2.5	10	55	4.5	Die
CHA2090-99F	17-24	23	1	2	10	55	4.5	Die
CHA2092b99F	18-32	22	2.5	2.5	10	60	3.5	Die
CHA2190-99F	20-30	15	0.5	2.2	11	50	4	Die
CHA2362-98F	26-40	22	-	2	9	65	4	Die
CHA2595-QDG	27.5-43.5	19.5	-	2.3	11	61	3.3	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4253-FAB	17-21	26	33	23.5	24.5	230	4	Hermetic SMD
CHA4253aQQG	17-24	23	33	24	24.5	230	4	QFN
CHA5350-99F	17-24	26	35.5	26.5	27	300	6	Die
CHA3092-99F	20-33	22	29	20	-	300	3.5	Die
CHA2098b99F	20-40	19	-	16	16	150	3.5	Die
CHA3409-98F	25-45	23	26	19	20	100	4	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD
CHT4694-QAG	25-40	4	22	22	QFN
CHT4694-99F	25-45	4	24	22	Die

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3693-FAB	21-26.5	9-14	DC-3.5	13	2.5	-12	2	160	4	Hermetic SMD
CHR2295-99F	24-30	12-15	DC-1.5	11	3.5	-10	10	120	3.5	Die

MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1290-99F	20-30	10-15	DC-6	-10	0	-4	33	4	Die
CHM1291-99F	25-32	12-15.5	0.1-3	-11	0	5	55	3.5	Die
CHR2294-99F	25-35	11-19	DC-3	-11	2.5	9	55	4	Die

6-18GHz Chipset

Analogue Attenuator

CHT4690-FAB
CHT4690-99F
CHT4690-QAG

Switch

CHS5100-99F
CHS8618-99F

MPA


CHA3023-99F
CHA3024-99F
CHA3024-QGG
CHA3063-99F
CHA3664-QAG
CHA4220-98F
CHA4220-QGG

Digital Attenuator

CHT3029-99F
CHT3029-QEG
CHT4016-99F
CHT4016-QEG

Phase Shifter

CHP4511-99F

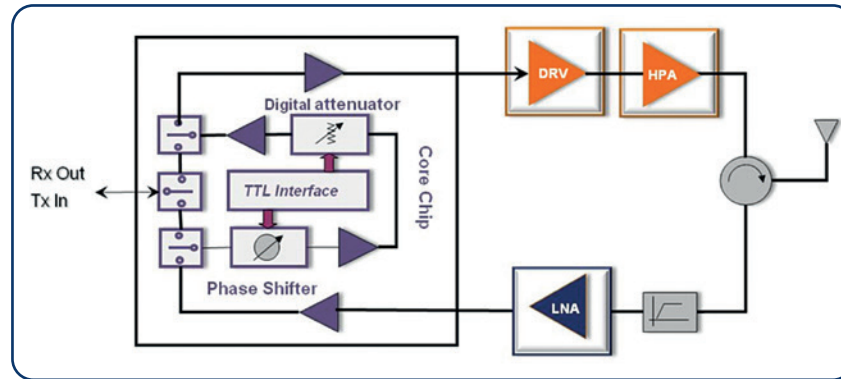

LNA

CHA3024-FDB
CHA3656-FAB
CHA3218-99F
CHA3666-99F
CHA3666-QAG
CHA3666-FAB
CHA3024-QGG

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3218-99F	2-18	24	1	2	15	120	4	Die
CHA3024-FDB	2-22	14.5	-	3.25	17.5	100	5	Hermetic SMD
CHA3656-FAB	5.8-16	20	-	1.75	14.5	70	3.3	Hermetic SMD
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3666-FAB	6-16	21	1	1.8	17	80	4	Hermetic SMD
CHA3666-99F	6-17	21	0.5	1.8	17	80	4	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4220-98F	0.5-20	17	28	20	23	120	6.5	Die
CHA4220-QGG	0.5-20	17	28	20	23	120	6.5	QFN
CHA3023-99F	1-18	14	-	17	-	95	5	Die
CHA3024-99F	2-22	15	30	18	20	100	5	Die
CHA3024-QGG	2-22	15	28	18	20	100	5	QFN
CHA3664-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3063-99F	5.5-23	19	28	18	21	160	4	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN
CHT4690-FAB	5-30	3.5	37	25	Hermetic SMD

ATTENUATOR – DIGITAL

Part Number	RF Bandwidth (GHz)	Number of Bits	Amplitude Control (dB)	Insertion loss (dB)	Attenuation error (dB)	P-1dB IN (dBm)	Control voltage (V)	Case
CHT3029-QEG	DC-30	4	15	5	+/-0.5	20	0/3.3 or 5	QFN
CHT3029-99F	DC-35	4	15	4.5	+/-0.5	20	0/3.3 or 5	Die
CHT4016-QEG	4-14	6	31.5	7	+/-0.8	23	-5/0	QFN
CHT4016-99F	4-16	6	31.5	6.5	-1.5/1	18	-5/0	Die


PHASE SHIFTER

Part Number	RF Bandwidth (GHz)	Number of Bits	Phase range (°)	Insertion Loss (dB)	Phase Error (° p-p)	P-1dB IN (dBm)	Control voltage (V)	Case
CHP4511-99F	6-18	4	360	13	10	23	-5/0	Die

SWITCH

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS5100-99F	DC-20	2.1	20	30	reflective	Die
CHS8618-99F	6-18	1.3	42	34	reflective	Die

Automotive & ISM 24GHz

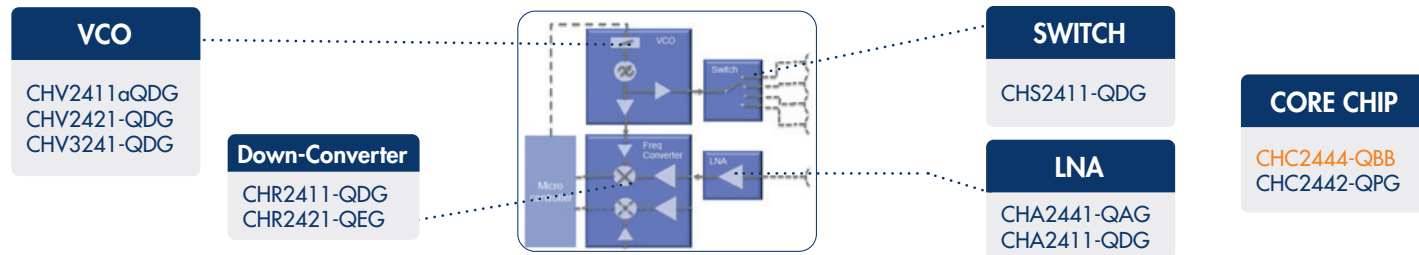

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA2411-QDG	20-25	26	0.5	2.5	-	43	5	QFN
CHA2441-QAG	21-26	25.5	+/- 0.25	2.5	12	50	3.3	QFN

TRX - 1TR2

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout TX (dBm)	NF RX (dB)	Number of Bit Atten.	Bias (mA)	Bias (V)	Case
CHC2442-QPG	24-24.5	37	VCO incl.	13.5	11.5	5	225	3.3	QFN

TRX - 1TR4

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout TX (dBm)	NF RX (dB)	Number of Bit Atten.	Bias (mA)	Bias (V)	Case
CHC2444-QBB	24.25-24.5	37	VCO incl.	13	11.5	5	315	3.3	QFN

RECEIVER - R1 & R2

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR2411-QDG	22-24.5	22-24.5	DC-0.001	23	7	-21	5	60	5	QFN
CHR2421-QEG	23.75-24.5	23.75-24.5	DC-0.001	22	7	-20	2	165	5	QFN

TX - 1T & 2T


Part Number	Central Output Freq (GHz)	Tuning Bandwidth (GHz)	Noise @ 100KHz (dBc/Hz)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHV2411aQDG	24.125	2	-90	16	220	5	QFN
CHV3241-QDG	24.125	2	-94	16	225	5	QFN
CHV2421-QDG	24.25	2	-90	15	233	5	QFN

SWITCH - SP4T

Part Number	RF Bandwidth (GHz)	Loss (dB)	P-1dB IN (dBm)	Isolation (dB)	Type	Case
CHS2411-QDG	23-26	2.9	23.5	35	reflective	QFN

Automotive qualified product

Automotive & ISM 77GHz

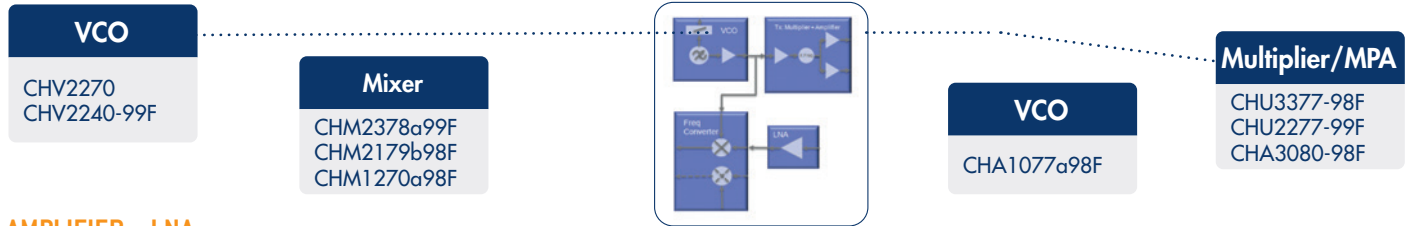

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA1077a98F	76-77	15	0.5	4.5	9	80	5	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3080-98F	71-76	16	25	19	21	280	3.5	Die

MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM2179b98F	76-77	76-77	DC-0.1	-8	0	5.5	1	4.5	Die
CHM2378a99F	76-77	76-77	DC-0.1	-7.5	0	7	1.5	4.5	Die
CHM1270a98F	76-77	76-77	DC-0.1	-7.5	0	15	-	-	Die


MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHU3377-98F	X6	12.67-12.83	76-77	4	15	210	4.5	Die
CHU2277-99F	X2	38-38.5	76-77	5	13	180	4.5	Die

VCO

Part Number	Central Output Freq (GHz)	Tuning Bandwidth (GHz)	Noise @ 100KHz (dBc/Hz)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHV2270-98F	12.7	1.2	-100	14	150	4.5	Die
CHV2240-99F	38.2	-	-100	9	120	4.5	Die

Telecoms 6-8.5GHz

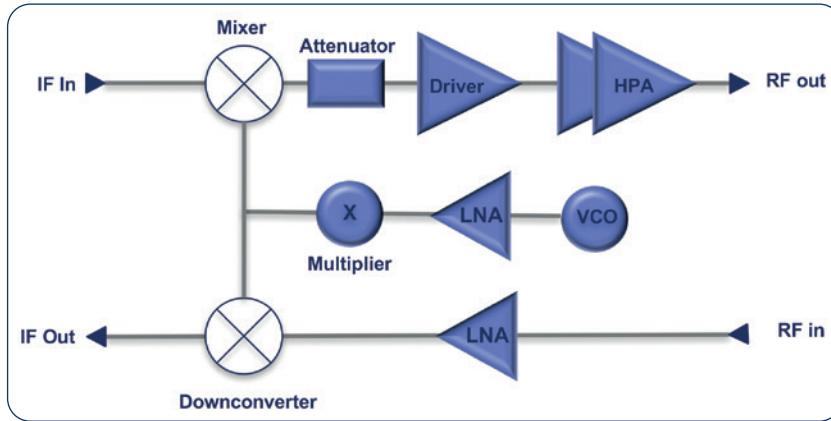

Buffer, VGA

CHA3565-QAG
CHA3665-QAG
CHA3666-QAG
CHA3664-QAG

LNA

CHA3656-QAG
CHA3666-99F
CHA3666-QAG
CHA2063a99F
CHA3024-QGG

Attenuator

CHT4690-99F
CHT4690-QAG
CHT4660-QAG

MPA

CHA4350-QDG
CHA3063-99F

IQ down converter

CHR3762-QDG
CHR3662-QDG
CHR3861-QEG

Detector

CHE1270a98F
CHE1270-QAG
CHE1270a99F

HPA

CHA7060-QWA

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA7060-QWA	5.7-8.5	20	46	36	40	32 @10dBm	700	20	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3024-QGG	2-22	15	-	3	18	100	5	QFN
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3666-99F	6-17	21	0.5	1.8	17	80	4	Die
CHA3656-QAG	6-17	20	0.5	1.7	14	68	3	QFN
CHA2063a99F	7-13	19	2	2	8	40	4	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3664-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3665-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3565-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA4350-QDG	5.5-11.7	26	32	24	25	125	5.5	QFN
CHA3063-99F	5.5-23	19	28	18	21	160	4	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4660-QAG	DC-16	2	30	24	QFN
CHT4690-99F	5-30	4	28	25	Die
CHT4690-QAG	5-30	4	31	25	QFN

DETECTOR


Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a98F	5-44	-	30	Wide-Band	Die
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1270-QAG	10-44	-	30	Wide-Band	QFN

35

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3762-QDG	5.5-9	4-12	DC-3.5	14	1.7	-5	5	100	3	QFN
CHR3861-QEG	5.9-9	3-12.5	DC-3.5	12	2.5	-7	0	380	4	QFN
CHR3662-QDG	7-16	4.5-19.5	DC-3.5	13	3	-8	0	280	4.5	QFN

13-18GHz & VSAT Ku Chipset

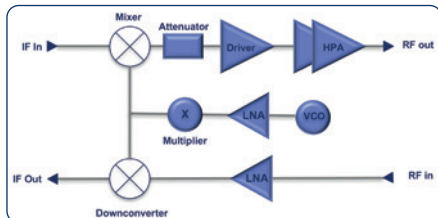

IQ down converter

CHR3763-QDG
CHR3352-QEG
CHR3364-QEG
CHR3662-QDG
CHR3362-QEG
CHR3664-QEG

Buffer, VGA

CHA3565-QAG
CHA3665-QAG
CHA3664-QAG
CHA3024-99F
CHA3024-QGG
CHA4253aQGG

Detector

CHE1260-98F
CHE1260-QAG
CHE1270a98F
CHE1270-QAG
CHE1270a99F

LNA

CHA3666-QAG
CHA2066-QAG
CHA3688aQDG
CHA3656-QAG

MPA

CHA4253aQGG
CHA5266-QDG

PA

CHA6362-QXG
CHA6550-QXG
CHA6550-98F

Attenuator

CHT4690-99F
CHT4690-QAG

Multiplier

CHX2193-99F
CHX2089-99F

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA6550-98F	17-23.6	22	39	33.5	34	20 @ Psat	1300	6	Die
CHA6550-QXG	17- 24	22	41	33.5	34	20 @ Psat	1300	6	QFN
CHA6362-QXG	17.7-19.7	22	42	33	34.5	24 @ Psat	1340	6	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3024-QGG	2-22	15	-	3	18	100	5	QFN
CHA3666-QAG	5.8-17	21	0.5	1.8	16	80	4	QFN
CHA3656-QAG	6-17	20	0.5	1.7	14	68	3	QFN
CHA2066-QAG	10-16	16	1	2.5	10	50	4	QFN
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3664-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3665-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA3565-QAG	5-21	15	25	19.5	20.5	120	5	QFN
CHA5266-QDG	10-16	23	35	25.5	27	320	5	QFN
CHA4253aQGG	17-24	23	33	24	24.5	230	4	QFN

AMPLIFIER – ANALOG VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	Gain Control Range (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3024-99F	2-22	15	0.5	3	30	18	100	5	Die
CHA3024-QGG	2-22	15	-	3	30	18	100	5	QFN
CHA4253aQQG	17-24	23	1	7.5	15	24	230	4	QFN

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4690-QAG	5-30	4	31	25	QFN

DETECTOR

Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1260-QAG	10-27	1	30	Bidirectionnal	QFN
CHE1270-QAG	10-44	-	30	Wide-Band	QFN


DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3662-QDG	7-16	4.5-19.5	DC-3.5	13	3	-8	0	280	4.5	QFN
CHR3362-QEG	10-16	6.5-19.5	DC-3.5	13	3.2	-6	0	310	4	QFN
CHR3352-QEG	12-16	8.5-19.5	DC-3.5	13	2.7	-6	0	250	4	QFN
CHR3763-QDG	12-16	8.5-19.5	DC-3.5	12	2.3	-8	5	80	3	QFN
CHR3364-QEG	17-24	6.5-14	DC-3.5	11	2.7	-7	0	320	4	QFN
CHR3664-QEG	17-27	7-15	DC-3.5	12	3.3	-8	0	320	4	QFN

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2193-99F	X2	6.25-8.25	12.5-16.5	12	14	60	3.5	Die
CHX2089-99F	X2	8-11.5	16-23	12	15	60	3.5	Die

23-26GHz Chipset

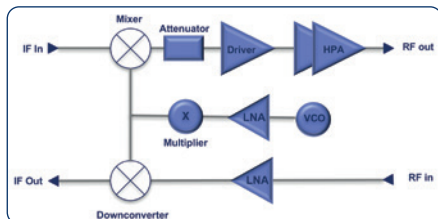

MPA

CHA3395-QDG
CHA5350-99F
CHA4253aQQG
CHA3660-QQG

PA

CHA6356-QXG
CHA6550-QXG
CHA6550-98F
CHA6652-QXG
CHA6652-98F

IQ down converter

CHR3364-QEG
CHR3764-QEG
CHR3693-QDG
CHM1290-99F
CHR3664-QEG

Buffer, VGA

CHA3395-QDG
CHA3688aQDG
CHA2293-99F
CHA4253aQQG
CHA3660-QGG

RF Front-End

CHC6053-QQA

Detector

CHE1260-98F
CHE1260-QAG
CHE1270a99F
CHE1270-QAG
CHE1270a98F

Attenuator

CHT4690-99F
CHT4690-QAG

Multiplier

CHX2095a99F
CHX2090-99F
CHX2090-QDG

LNA

CHA3688aQDG
CHA2069-QDG
CHA2090-99F
CHA2441-QAG

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA6550-98F	17-23.6	22	39	33.5	34	20 @ Psat	1300	6	Die
CHA6550-QXG	17- 24	22	41	33.5	34	20 @ Psat	1300	6	QFN
CHA6652-98F	21-27.5	22.5	39	32.5	33	25 @ Psat	1300	6	Die
CHA6652-QXG	21-27.5	20	41	32.5	33	25 @ Psat	1300	6	QFN
CHA6356-QXG	21.2-23.6	20	42	33	33.5	22 @ Psat	1300	6	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN
CHA2090-99F	17-24	23	1	2	10	55	4.5	Die
CHA2069-QDG	18-31	20	2	3	10.5	65	4.5	QFN
CHA2069-99F	18-31	22	1	2.5	10	55	4.5	Die
CHA2441-QAG	21-26	25.5	+/- 0.25	2.5	12	50	3.3	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA4253aQQG	17-24	23	33	24	24.5	230	4	QFN
CHA5350-99F	17-24	26	35.5	26.5	27	300	6	Die
CHA3660-QQG	21-27.5	25	32	19	21	180	4	QFN
CHA3395-QDG	21-29.5	24	32	20	22	180	4	QFN

AMPLIFIER – ANALOG VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	Gain Control Range (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA4253aQQG	17-24	23	1	7.5	15	24	230	4	QFN
CHA3660-QQG	21-27.5	25	1	4	15	19	180	4	QFN
CHA3395-QDG	21-29.5	24	0.5	4.5	15	20	180	4	QFN
CHA2293-99F	24-30	24	1.5	3	15	12	160	5	Die

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4690-99F	5-30	4	28	25	Die

DETECTOR

Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a98F	5-44	-	30	Wide-Band	Die
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1260-98F	10-27	0.8	30	Bidirectionnal	Die
CHE1260-QAG	10-27	1	30	Bidirectionnal	QFN
CHE1270-QAG	10-44	-	30	Wide-Band	QFN

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3364-QEG	17-24	6.5-14	DC-3.5	11	2.7	-7	0	320	4	QFN
CHR3664-QEG	17-27	7-15	DC-3.5	12	3.3	-8	0	320	4	QFN
CHR3693-QDG	21-26.5	9-14	DC-3.5	14	3	-12	2	160	4	QFN
CHR3764-QEG	21-27	8.5-15	DC-3.5	14	3.1	-7	0	320	4	QFN

RF FRONT-END

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Bias (mA)	Bias (V)	Case
CHC6053-QQA	24.25-27.5	18	33	10	32.5	3.5	150	18.4	QFN


MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1290-99F	20-30	10-15	DC-6	-10	0	-4	33	4	Die

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2095a99F	X4	6.25-8.25	25-33	12	11	75	3.5	Die
CHX2090-99F	X2	11-13	22-26	12	15	50	3.5	Die
CHX2090-QDG	X2	11-13	22-26	14	12	65	3.5	QFN

28-32GHz & VSAT Ka Chipset

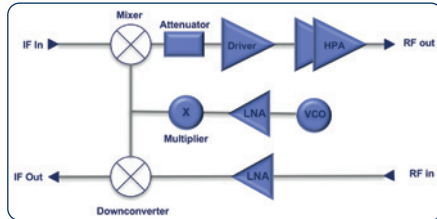

LNA

CHA2595-QDG
CHA3689-99F
CHA3688aQDG
CHA2092b99F
CHA2069-99F
CHA2190-99F

IQ down converter

CHR2294-99F
CHR2295-99F
CHM1290-99F
CHM1291-99F

Detector

CHE1270a98F
CHE1270-QAG
CHE1260-98F
CHE1260-QAG
CHE1270a99F

Buffer, VGA

CHA3689-99F
CHA3688aQDG
CHA2293-99F
CHA3395-99F
CHA3396-99F

MPA

CHA3409-98F
CHA3395-QDG
CHA3092-99F
CHA2098b99F
CHA3396-99F

PA

CHA6653-98F
CHA6653-QXG

RF Front-End

CHC6053-QQA

IQ up converter

CHR2294-99F

Multiplier

CHX3068-QDG
CHX2095a99F

Attenuator

CHT4694-99F
CHT4694-QAG

RF Front-End

CHC6053-QQA

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA6653-98F	27-33.5	20	38	32	33	23 @ Psat	900	6	Die
CHA6653-QXG	27-33.5	20	38	32	33	23 @ Psat	900	6	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3688aQDG	12.5-30	26	2	2	14	85	4	QFN
CHA3689-99F	12.5-30	26	2	2	15	90	4	Die
CHA2069-99F	18-31	22	1	2.5	10	55	4.5	Die
CHA2092b99F	18-32	22	2.5	2.5	10	60	3.5	Die
CHA2190-99F	20-30	15	0.5	2.2	11	50	4	Die
CHA2595-QDG	27.5-43.5	19.5	-	2.3	11	61	3.3	QFN

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3092-99F	20-33	22	29	20	-	300	3.5	Die
CHA2098b99F	20-40	19	-	16	16	150	3.5	Die
CHA3395-QDG	21-29.5	24	32	20	22	180	4	QFN
CHA3409-98F	25-45	23	26	19	20	100	4	Die
CHA3396-QDG	27-33.5	22	30	19	21	155	4	QFN

AMPLIFIER – ANALOG VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	Gain Control Range (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3395-QDG	21-29.5	24	0.5	4.5	15	20	180	4	QFN
CHA2293-99F	24-30	24	1.5	3	15	12	160	5	Die
CHA3396-QDG	27-33.5	22	1.5	4.5	15	19	155	4	QFN

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4694-QAG	25-40	4	22	22	QFN
CHT4694-99F	25-45	4	24	22	Die

DETECTOR

Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a98F	5-44	-	30	Wide-Band	Die
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1260-98F	10-27	0.8	30	Bidirectionnal	Die
CHE1260-QAG	10-27	1	30	Bidirectionnal	QFN
CHE1270-QAG	10-44	-	30	Wide-Band	QFN

RF FRONT-END

Part Number	RF Bandwidth (GHz)	Gain RX (dB)	Gain TX (dB)	Pout RX (dBm)	Pout TX (dBm)	NF RX (dB)	Bias (mA)	Bias (V)	Case
CHC6053-QQA	24.25-27.5	18	33	10	32.5	3.5	150	18;4	QFN

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR2295-99F	24-30	12-15	DC-1.5	11	3.5	-10	10	120	3.5	Die


MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1290-99F	20-30	10-15	DC-6	-10	0	-4	33	4	Die
CHM1291-99F	25-32	12-15.5	0.1-3	-11	0	5	55	3.5	Die
CHR2294-99F	25-35	11-19	DC-3	-11	2.5	9	55	4	Die

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2095a99F	X4	6.25-8.25	25-33	12	11	75	3.5	Die
CHX3068-QDG	X2	14-15	28-30	0	20	270	4	QFN

36-44GHz Chipset

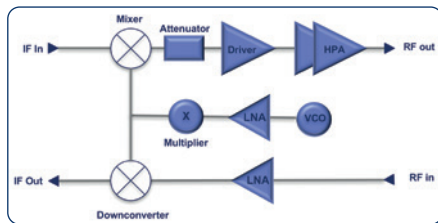

Multiplier

CHX1191-98F
CHX1191-QDG
CHX1162-QDG
CHX2091-99F
CHX2092a99F

IQ down converter

CHR3894-QEG
CHR3394-QEG
CHM1294-99F

LNA

CHA2595-QDG
CHA2362-98F
CHA2494-98F
CHA2494-QEG
CHA2094b99F
CHA2095a99F
CHA2394-99F
CHA2194-99F

Buffer, VGA

CHA2098b-99F
CHA3397-QDG
CHA3398-QDG

Attenuator

CHT4694-99F
CHT4694-QAG
CHT4699-QDG

MPA

CHA3409-98F
CHA2098b99F
CHA3397-QDG
CHA3398-QDG

PA

CHA5659-98F
CHA6194-QXG
CHA5659-QXG

Detector

CHE1270a98F
CHE1270-QAG
CHE1270a99F

IQ up converter

CHM1294-99F

AMPLIFIER – HPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	PAE %	Bias (mA)	Bias (V)	Case
CHA5659-98F	36-43.5	22	38	30	31	15 @ Psat	800	6	Die
CHA5659-QXG	36-43.5	20	38.5	29.5	30	15 @ Psat	800	6	QFN
CHA6194-QXG	37- 40	20	38	30	31	-	800	6	QFN

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA2362-98F	26-40	22	-	2	9	65	4	Die
CHA2595-QDG	27.5-43.5	19.5	-	2.3	11	61	3.3	QFN
CHA2494-98F	34-44	20	-	3	12	80	4	Die
CHA2494-QEG	34-44	22	1.5	3	12	80	4	QFN
CHA2094b99F	36-40	21	1.5	3	8	60	3.5	Die
CHA2095a99F	36-40	26	1	3.5	10	90	3.5	Die
CHA2394-99F	36-40	21	1.5	2.5	8	60	3.5	Die
CHA2194-99F	36-44	19	0.5	3	10	45	3.5	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA2098b99F	20-40	19	-	16	16	150	3.5	Die
CHA3409-98F	25-45	23	26	19	20	100	4	Die
CHA3397-QDG	36-40.5	21	29	18	20	200	4	QFN
CHA3398-QDG	38-43.5	22	29	18	19	200	4	QFN

AMPLIFIER – ANALOG VGA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	Gain Control Range (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA3397-QDG	36-40.5	21	1	7	15	18	200	4	QFN
CHA3398-QDG	38-43.5	22	1	7	15	18	200	4	QFN

ATTENUATOR – ANALOG

Part Number	RF Bandwidth (GHz)	Insertion Loss (dB)	Amplitude Control (dB)	P-1dB IN (dBm)	Case
CHT4694-QAG	25-40	4	22	22	QFN
CHT4694-99F	25-45	4	24	22	Die
CHT4699-QDG	36-44	4	30	20	QFN

DETECTOR

Part Number	RF Bandwidth (GHz)	Loss (dB)	Dynamic Range (dB)	Type	Case
CHE1270a98F	5-44	-	30	Wide-Band	Die
CHE1270a99F	5-44	-	30	Wide-Band	Die
CHE1270-QAG	10-44	-	30	Wide-Band	QFN

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR3394-QEG	37-40	17.5-21	DC-3.5	13	3.5	-7	0	250	4	QFN
CHR3894-QEG	37-40	17.5-21	DC-3.5	13	4	-6	0	250	4	QFN


MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1294-99F	35-45	16-24	DC-3	-11	0	10	60	4	Die

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX2092a99F	X4	9-10	36-40	12	11	80	3.5	Die
CHX1191-QDG	X3	11-14.5	33-43.5	1	6	80	5	QFN
CHX1191-98F	X3	11.25-14.5	33.75-43.5	-1	6	80	5	Die
CHX2091-99F	X2	17-20	34-40	12	12	50	3.5	Die
CHX1162-QDG	X2	17.5-21.5	35-43	1	8	50	5	QFN

52-85GHz & E-Band Chipset

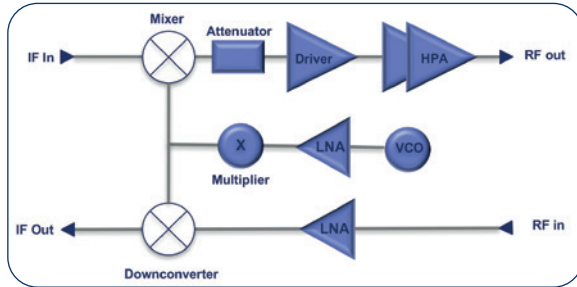

IQ down converter

CHR1080a98F
CHM1298-99F

PA

CHA3080-98F
CHA3090-98F

Multiplier

CHX2192-99F
CHX1191-98F
CHX1191-QDG
CHX1162-QDG

MPA

CHA2159-99F
CHA2157-99F

LNA

CHA2080-98F
CHA2159-99F
CHA2157-99F
CHA1077a98F
CHA1008-99F

Buffer, VGA

CHA2080-98F
CHA2159-99F
CHA2157-99F

IQ up converter

CHM1080-98F
CHM1298-99F

AMPLIFIER – LNA

Part Number	RF Bandwidth (GHz)	Gain (dB)	Gain Flatness (+/-dB)	Noise Figure (dB)	P-1dB OUT (dBm)	Bias (mA)	Bias (V)	Case
CHA2157-99F	55-60	10	1	3.5	15	60	3.3	Die
CHA2159-99F	55-65	20	1	4	14	115	3.5	Die
CHA2080-98F	71-86	22	0.8	3.5	10	75	3.5	Die
CHA1077a98F	76-77	15	0.5	4.5	9	80	5	Die
CHA1008-99F	80-105	17	1	6.5	5	115	2.5	Die

AMPLIFIER – MPA

Part Number	RF Bandwidth (GHz)	Gain (dB)	IP3 (dBm)	P-1dB OUT (dBm)	Sat. Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHA3080-98F	71-76	16	25	19	21	280	3.5	Die
CHA3090-98F	81-86	13	23	17	19	280	3.5	Die

DOWN - CONVERTER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	Noise Figure (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHR1080a98F	71-86	34.5-44	DC-12	8	5	-10	1	175	3.5	Die

MIXER

Part Number	RF Bandwidth (GHz)	LO Bandwidth (GHz)	IF Bandwidth (GHz)	Conv. Gain (dB)	P-1dB IN (dBm)	LO Input Power (dBm)	Bias (mA)	Bias (V)	Case
CHM1298-99F	55-65	27.5-32.5	DC-5	-12	0	10	90	3.5	Die
CHM1080-98F	71-86	34.5-44	DC-12	-11	10	2	90	3.5	Die

45

MULTIPLIER

Part Number	Xn	Input Bandwidth (GHz)	Output Bandwidth (GHz)	Input Power (dBm)	Output Power (dBm)	Bias (mA)	Bias (V)	Case
CHX1191-QDG	X3	11-14.5	33-43.5	1	6	80	5	QFN
CHX1191-98F	X3	11.25-14.5	33.75-43.5	-1	6	80	5	Die
CHX1162-QDG	X2	17.5-21.5	35-43	1	8	50	5	QFN
CHX2192-99F	X2	27-33	54-66	12	11	130	3.5	Die

Catalogue products commercial designation


Prefix		Radical <i>(The 1st digit after the prefix indicate the power range)</i>			Suffix	
CHA	Amplifiers	W	dBm		Bare die products	Packages <i>(The first letter defines the package family)</i>
CHC	Core chips / RF Front End	1	P < 10mW	P < 10dBm		
CHE	Detectors	2	10mW < P < 30mW	10dBm < P < 150dBm	99F Standard	F Ceramic metal SMD unleaded
CHK	GaN power bars	3	30mW < P < 100mW	15dBm < P < 20dBm		Q Over molded plastic SMD
CHM	Mixers	4	100mW < P < 300mW	20dBm < P < 25dBm		
CHP	Phase shifters	5	300mW < P < 1W	25dBm < P < 30dBm	98F With BCB protection	S Ceramic metal non SMD leaded
CHR	Down-converters	6	1W < P < 5W	30dBm < P < 37dBm		
CHS	Switch	7	5W < P < 10W	37dBm < P < 40dBm		
CHT	Attenuators	8	10W < P < 50W	40dBm < P < 47dBm	<i>Dies can be delivered in Gel Pack, Waffle Pack or wafer on films</i> <i>QFN can be delivered in Stick, Tape & Reel or Waffle Pack</i> <i>Other Package in waffle Pack</i>	
CHU	Up-converters	9	50W < P < 100W	47dBm < P < 50dBm		
CHV	Oscillators	A	100W < P < 500W	50dBm < P < 57dBm		
CHX	Multipliers	B	500W < P < 1000W	57dBm < P < 60dBm		
CHZ	GaN power bars internally matched	C	1000W < P < 5000W	60dBm < P < 67dBm		
EC	GaAs transistors					

Exemple line

CHA	6710	- 99F
-----	------	-------

Notes

Your Leading Source for Products, Support & Services



Contact us:

UMS SAS – EMEA,

Ph: +33 1 69 86 32 00
mktsales@ums-gaas.com

UMS USA, Inc. - America,

Ph: +1 781 791 5078
philippe.labasse@us.ums-gaas.com

UMS - Asia,

Ph: +86 21 6103 1703
xavier.taltasse@ums-gaas.com

Worldwide distributor:
Richardson RFPD
www.richardsonrfpd.com

www.ums-gaas.com

